

## SURFTEST SJ-410 SERIES

Portable Surface Roughness Tester


FORM MEASUREMENT



Portable Surface Roughness Tester

# Surftest SJ-410 Series

*Analysis functions that are a notch above the rest*

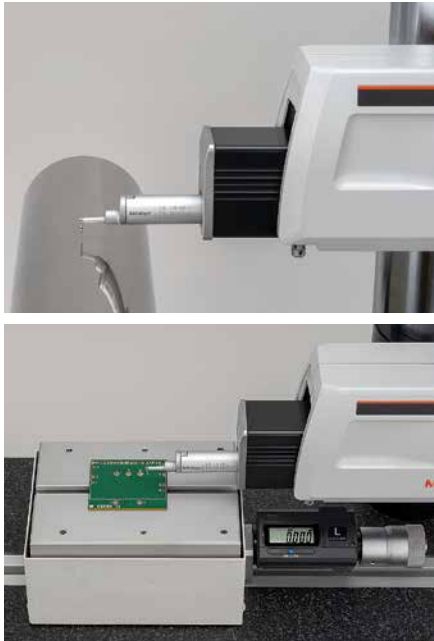

User benefit **1**

Easy and safe measurements that anyone can perform efficiently

User benefit **2**

A higher-level of quality control



**Touch screen for easier operations**

The high-visibility color-graphic LCD touch screen clearly displays calculated results and assessed profiles. A backlight enables comfortable viewing even under poor lighting conditions.

User benefit **3**

Space-saving dual functionality



**SJ-412**  
Traverse range 50 mm

**SJ-411**  
Traverse range 25 mm

User benefit




Easy and safe measurements that anyone can perform efficiently

The auto-set unit\* enables measurements to be made with a single button push, saving you time and increasing work efficiency.



The auto-set function safely controls descent of the detector, eliminating the possibility of operator error causing damage to the stylus.

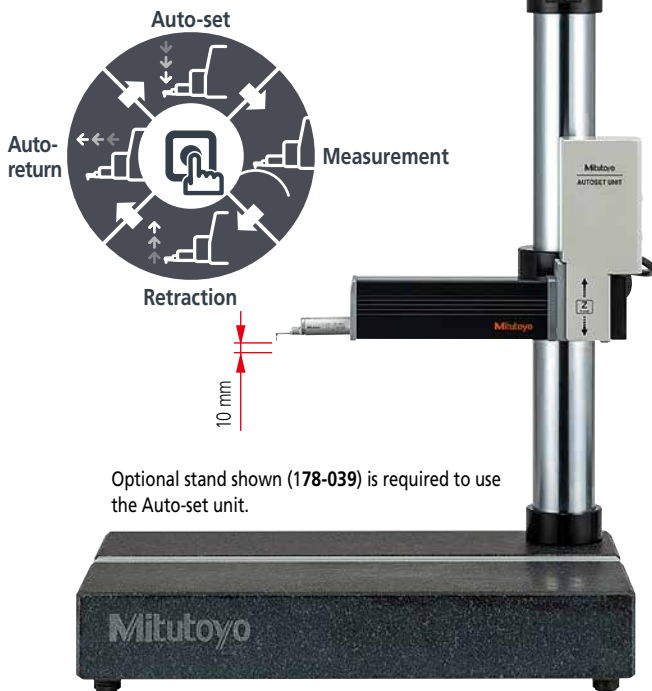

Optional stand shown (178-039) is required to use the Auto-set unit.

**Auto-set unit\***  
178-010


This unit automatically completes a full measurement cycle of stylus contact, measurement, stylus retraction, and detector auto-return with just one button push (stylus retraction and detector auto-return can be switched on and off by operating the drive unit).



**Options for SJ-410 Series**


**X-axis adjustment unit\***  
178-020

This unit helps fine-tune the horizontal (X axis) direction.

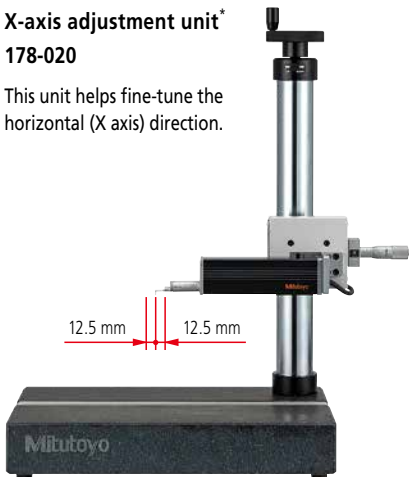


**Tilting adjustment unit\***  
178-030

This unit is used for aligning the workpiece surface with the detector reference plane. It supports the DAT function to make the leveling of workpiece surfaces easier.

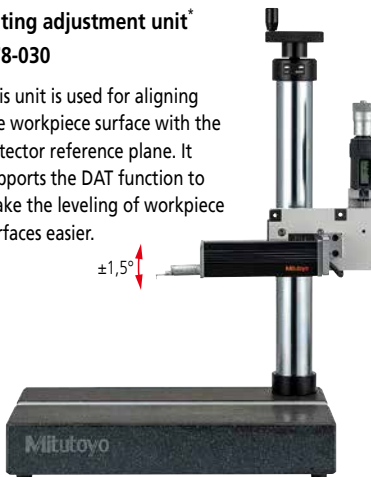


**Complete set\***

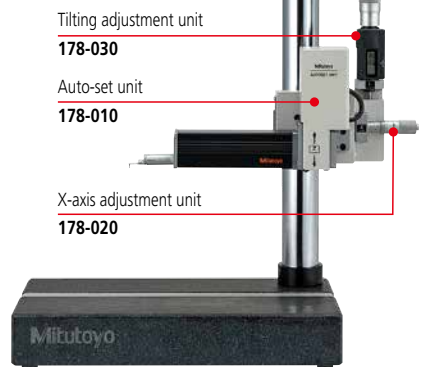

\* This is an optional accessory for the SJ-410 Series. It can only be used on the simple column stand (optional accessory, order No. 178-039). When the units are used in combination, straightness for SJ-411/412 drive units will be degraded by about 0,2 μm. Cannot be used when the tester's main unit is an older model (SJ-401/402).


### Assessing a single measurement result under two different evaluation conditions

A single measurement enables simultaneous analysis under two different evaluation conditions. A single measurement allows calculation of parameters and analysis of filtered profiles without the need for recalculation after saving data, contributing to higher work efficiency.

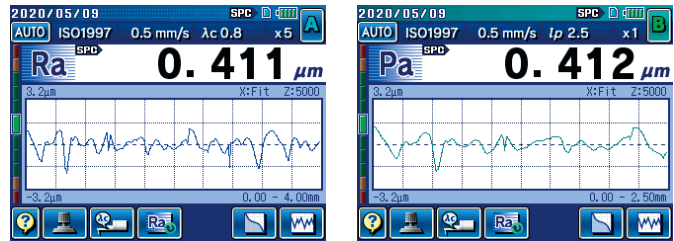

### 3-axis Adjustment Table <Option> 178-047

This table helps make the alignment adjustments required when measuring cylindrical surfaces. The corrections for the pitch angle and the swivel angle are determined from a preliminary measurement and the Digimatic micrometers are adjusted accordingly. A flat-surfaced workpiece can also be leveled with this table.

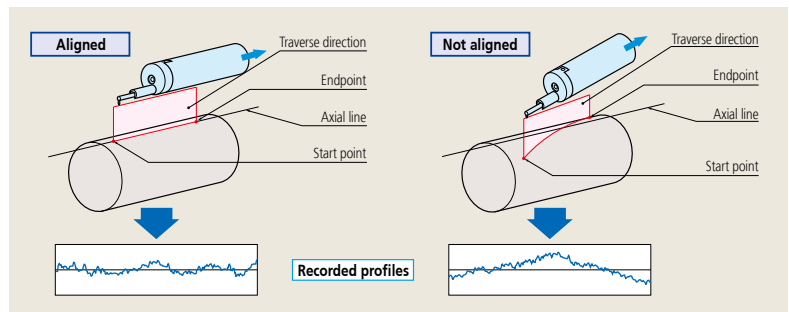

### DAT Function for the leveling table <Option>

The leveling table can be used to align the surface to be tested with the detector reference plane while the operator is guided through the procedure by screen prompts.


#### 178-048

Inclination adjustment angle:  $\pm 1.5^\circ$   
 Table dimensions: 130x100 mm  
 Maximum load: 15 kg



### Powerful support for leveling

The height/tilt adjustment unit comes as standard for leveling the drive unit prior to making skidless measurements. When supported by guidance from the unique DAT function, it is also extremely easy to achieve highly accurate alignment.

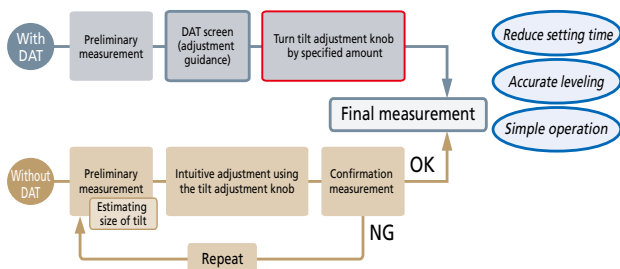

### Simple column stand for SJ-410 Series <Option>

#### 178-039

Vertical adjustment range: 250 mm  
 Dimensions: 400x250x578 mm  
 Mass: 20 kg




Combining (adjustment guidance)

User benefit **2**

Higher level of quality control

Wireless communication and advanced analysis

Anyone can easily perform high-level data collection.

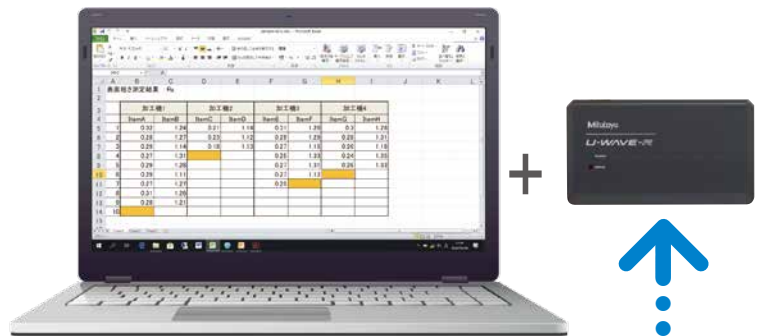

Wireless and quick capture of measurement results on a PC - no more handwriting, as data can be input easily with a single touch <Option>

 Wireless Input Tool  
**U-WAVE**

This unit allows you to remotely load Surftest SJ-410 calculation results (SPC output) into commercial spreadsheet software on a PC. By enabling one-touch operation for entering calculation results at a distance, the U-WAVE system improves efficiency and helps reduce human error.



**U-WAVE-R** (Connects to the PC)  
**02AZD810D**



**U-WAVE-T\*** (Connects to the SJ-410)  
**02AZD880G**  
\* Requires the optional Surftest SJ-410 connection cable.  
**02AZD790D**

 One-touch Input  
**USB Input Tool**

This unit allows you to load Surftest SJ-410 calculation results (SPC output) into commercial spreadsheet software on a PC via USB connector. By enabling one-touch operation for entering calculation results instantaneously, the USB Input Tool improves efficiency and helps reduce human error.



**USB Input Tool Direct**  
**USB-ITN-D**  
**06AFM380D**





**USB keyboard signal conversion type\***  
**IT-016U**  
**264-016-10**  
\* Requires the optional Surftest SJ-410 connection cable.  
1 m: **936937**  
2 m: **965014**

Use the USB Communication Tool to create inspection record tables and perform advanced analysis

For SURFTEST SJ-410 Series

## USB Communication Tool (Free software)

The SurfTest SJ-410 Series has a USB interface, enabling measurement condition setup and start via PC. We also provide a program that lets you create inspection record tables using a Microsoft Excel® macro.

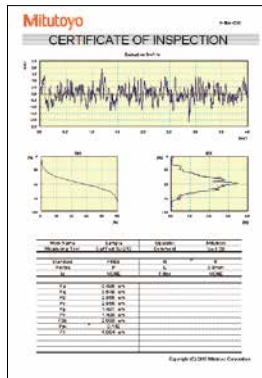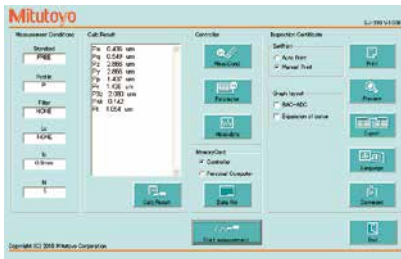

This program can be downloaded free of charge from the Mitutoyo website.  
[https://mitutoyo.eu/en\\_us/downloads/software-and-updates](https://mitutoyo.eu/en_us/downloads/software-and-updates)

Required environment\*

- OS: Windows 7, Windows 8, Windows 10
- Spreadsheet software: Microsoft Excel 2010, Microsoft Excel 2013, Microsoft Excel 2016

\* Windows OS and Microsoft Excel are products of Microsoft Corporation.

The optional USB cable is also required.

USB cable for SJ-410 Series 12AAD510

### Contour/Roughness analysis software

## FORMTRACEPAK-AP

More advanced analysis can be performed by loading SJ-410 Series measurement data to FORMTRACEPAK-AP via a memory card (option) for processing back at base.

### High-accuracy measurements with selectable drive unit

A wide range, high-resolution detector

- Detector
- Measuring range/resolution: 800 μm/0.01 μm, 80 μm/0.001 μm, 8 μm/0.0001 μm




- High straightness drive unit
- Drive unit
- Straightness/traverse length: 0.3 μm/25 mm (SJ-411), 0.5 μm/50 mm (SJ-412)

### Narrow-part measurement feature


Surface roughness measurement requires a run-up distance before starting the actual measurement (or retrieving data). When the SJ-410 Series measures, its run-up distance is normally set to 0.5 mm. However, this distance can be shortened to 0.15 mm using the narrow-part measurement function. This function extends the measurement of narrow locations to features such as piston-ring grooves and O-ring grooves.

#### Typical applications

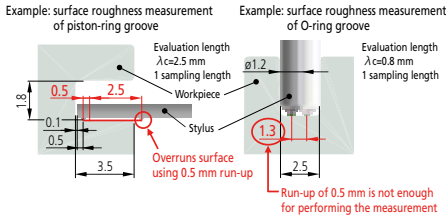

### Easily measures R-surface roughness (skidless measurement)

Usually, a spherical or cylindrical surface (R-surface) cannot be evaluated, but, by removing the radius with a filter, R-surface data is processed as if taken from a flat surface. Other curved surfaces can be processed besides cylindrical, such as parabolical and ellipsoidal.

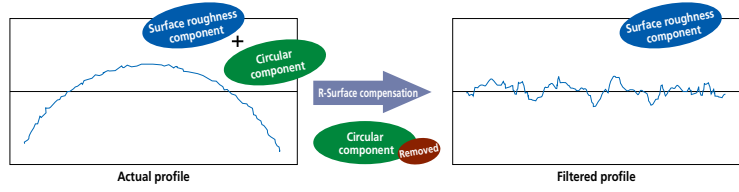

User benefit **3**


Doing double duty for space saving  
Surface Roughness / Fine Contour

Supports not only surface roughness measurement but also fine contour measurement




Simple contour analysis function


Point group data collected for surface roughness evaluation is used to perform simplified contour analysis (step, step height, area, and coordinate difference). It assesses minute forms that cannot be assessed by a regular contour measuring machine.

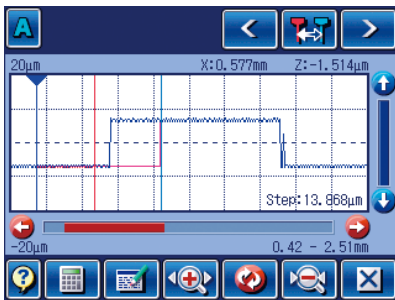

Step

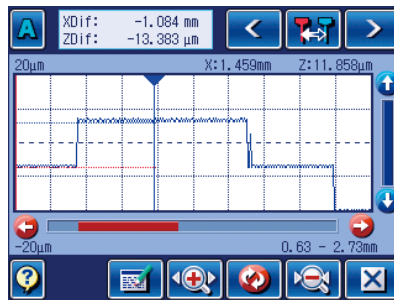

Coordinate difference

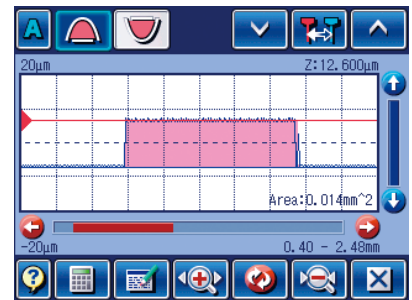


Area

Your choice of skidless or skidded measurement

Skidless measurement

Skidless measurement is where surface features are measured relative to the drive unit reference surface. This measures waviness and finely stepped features accurately, in addition to surface roughness, but the range is limited to the available stylus travel.



Measuring example of stepped features: Skidless




Measured profile



Skidded measurement

In skidded measurements, surface features are measured with reference to a skid following close behind the stylus. This cannot measure waviness and stepped features exactly but the range of movement within which measurement can be made is greater because the skid tracks the workpiece surface contour.

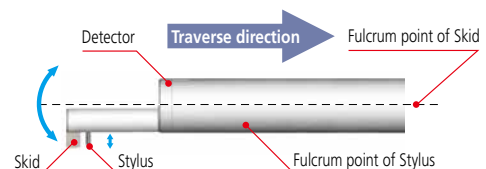

Measuring example of stepped features: Skidded




Measured profile






**Easy to use and highly functional**

This portable surface roughness tester is equipped with analysis functionality rivaling that of benchtop surface roughness testers.

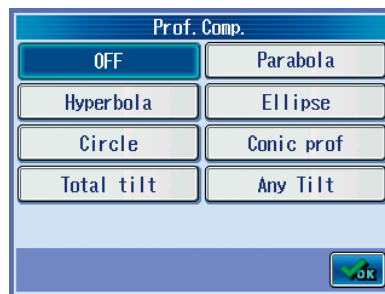

Data compensation

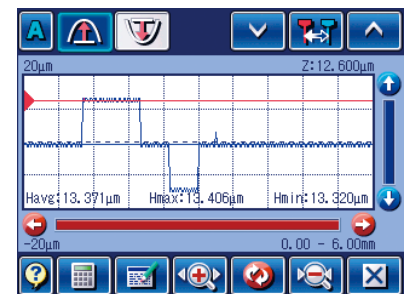

Simple contour analysis function

**Equipped with externally controllable interfaces as standard**

**A variety of interfaces supplied as standard**

The external device interfaces that come as standard include USB, RS-232C, SPC output, and Footswitch I/F.



**Data storage**

**Memory card (optional) is supported**

The measurement conditions and data can be stored in a memory card (optional) and recalled as required. This enables batch analysis and printout of data after on-site measurement.




- Measurement condition  
Internal memory: 10 sets  
Memory card: 500 sets
- Measurement result  
Memory card: 10000 sets

**High-speed thermal printer built in**

**High-speed printer prints out measurement results on site**

A high-quality, high-speed thermal printer prints out measurement results.

It can also print a BAC curve or an ADC curve as well as calculated results and assessed profiles. These results and profiles are printed out in landscape format, just as they appear on the color-graphic LCD.

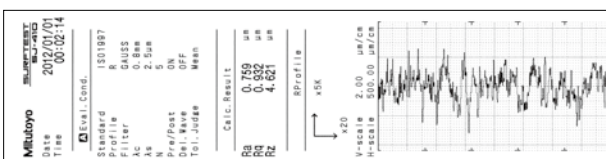

**Equipped with convenient carrying case as standard**

The unit is easily transported in a dedicated carrying case which includes holders for the accessories as well as the tester itself. (Standard accessory)




## Other Optional Accessories

### XY leveling tables

The tester includes X- and Y-axes micrometer heads. This makes axis alignment much easier because the tilt adjustment center is the same as the rotation center of the table.

(Order No. **178-042-1** / **178-043-1**)



Movement is in X and Y axes only.



178-042-1




178-049

| Order No.                    | 178-042-1 (mm)<br>with digital heads | 178-043-1 (mm)<br>with analog heads | 178-049 (mm)<br>with digital heads |
|------------------------------|--------------------------------------|-------------------------------------|------------------------------------|
| Table dimensions             | 130x100 mm                           |                                     |                                    |
| Maximum load                 | 15 kg                                |                                     |                                    |
| Inclination adjustment angle | ±1,5°                                |                                     | —                                  |
| Swiveling angle              | ±3°                                  |                                     | —                                  |
| X/Y-axis travel range        | ±12,5 mm                             | ±12,5 mm                            | ±12,5 mm                           |
| Resolution                   | 0,001 mm                             | 0,01 mm                             | 0,001 mm                           |
| Dimensions (WxDxH)           | 262x233x83 mm                        | 220x189x83 mm                       | 262x233x55 mm                      |
| Mass                         | 6,3 kg                               | 6 kg                                | 5 kg                               |

### Precision vise

Fits on the stand.



Application

|                 |              |
|-----------------|--------------|
| Order No.       | 178-019      |
| Clamping method | Sliding jaws |
| Jaw opening     | 36 mm        |
| Jaw width       | 44 mm        |
| Jaw depth       | 16 mm        |
| Height          | 38 mm        |

### Roughness specimen Ra 0,4 / Ra 3µm



### Cylinder attachment

This block can be positioned on top of cylindrical objects to perform measurements.

**12AAB358**

Diameter: ø15 to 60 mm

Configuration

- Cylindrical measurement block
- Auxiliary block
- Clamp



### Reference step specimen

Used to calibrate detector sensitivity.

**178-611**

Step nominal values: 2 µm / 10 µm



### Optional accessories, consumables, and others for SJ-410

- Printer paper (5 rolls) **270732**
- Touch-screen protector sheet (10 sheets) **12AAN040**
- Memory card \* (2 GB) **12AAW452**
- Connecting cable (for RS-232C) **12AAA882D**
- Footswitch **12AAJ088**

\* micro SD card (with a conversion adapter to SD card)

# Enhanced standard functions

## Sheet buttons

### Single-button measurements

A sturdy sheet-button panel with superior durability in any environment is provided. For repeat measurement of the same work, simply pressing the start switch can complete measurement, analysis, and printout.




## Recalculating

Previously measured data can be recalculated for use in other evaluations by changing the current standard, assessed profile, and roughness parameters.

Note: Some conditions are limited.

## GO/NG judgment function

A "GO/NG" judgment symbol is displayed when limits are set for the roughness parameter. In the case of "NG," the calculated result is highlighted and can also be printed out.



| Calc. Result |          |    |
|--------------|----------|----|
| Ra           | ↑ 1.103  | μm |
| Rq           | OK 1.427 | μm |
| Rz           | ↓ 7.259  | μm |

The "OK" symbol means the measurement is within the limits set; "NG" means it is not, in which case an arrow points to either the upper or lower limit in the printout.

## Multilingual support

### The display interface supports 16 languages.

(Japanese, English, German, French, Italian, Spanish, Portuguese, Korean, Chinese (simplified/traditional), Czech, Polish, Hungarian, Turkish, Swedish, Dutch)

## Password protection

### Access to functions can be restricted by a password

A pre-registered password can limit use of measurement conditions and other settings to the tester's administrator.

## Arbitrary sampling length setting

This function allows a sampling length to be arbitrarily set in 0.01 mm increments (SJ-411: 0.1 mm to 25 mm, SJ-412: 0.1 mm to 50 mm).

It also allows the SJ-410 Series to make both narrow and wide range measurements.

## Applicable standards

### Complies with many industry standards


The SurfTest SJ-410 complies with the following standards:

JIS (JIS-B0601-2001, JIS-B0601-1994, JIS B0601-1982), VDA, ISO-1997, and ANSI.



# Detectors/Styli

## Detectors

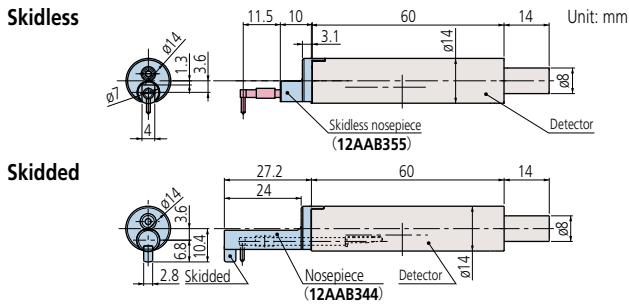

| Order No.                | Measuring force |  |
|--------------------------|-----------------|--|
| 178-396-2 <sup>*1*</sup> | 0,75 mN         | *97ISO and *01JIS compliant detectors                                |
| 178-397-2 <sup>*1*</sup> | 4 mN            | Detectors that comply with previous standards, for general use, etc. |
| 178-396 <sup>*2*</sup>   | 0,75 mN         | *97ISO and *01JIS compliant detectors                                |
| 178-397 <sup>*2*</sup>   | 4 mN            | Detectors that comply with previous standards, for general use, etc. |


- \*1 The skidless nosepiece (12AAB355) is a standard accessory.
- \*2 The skidless nosepiece (12AAB355) and the nosepiece (12AAB344) are standard accessories.
- \*3 The standard stylus (12AAC731) is a standard accessory.
- \*4 The standard stylus (12AAB403) is a standard accessory.

## Styli Unit: mm

### Standard stylus


- 12AAE882 (1 μm)
- 12AAE924 (1 μm)<sup>\*5</sup>
- 12AAC731 (2 μm)
- 12AAB403 (5 μm)<sup>\*5</sup>
- 12AAB415 (10 μm)<sup>\*5</sup>
- 12AAE883 (250 μm)<sup>\*8</sup>

( ) : Tip radius



### For deep holes<sup>\*6</sup>


- 2X stylus
  - 12AAC740 (2 μm)
  - 12AAB413 (5 μm)<sup>\*5</sup>
  - 12AAB425 (10 μm)<sup>\*5</sup>
- ( ) : Tip radius



### Nosepiece


For standard measurement  
12AAB344  
Remarks ø2 to 20

For round bars  
12AAB345




### 3X stylus

- 12AAC741 (2 μm)
  - 12AAB414 (5 μm)<sup>\*5</sup>
  - 12AAB426 (10 μm)<sup>\*5</sup>
- ( ) : Tip radius




### For small hole measurement

- 12AAC732 (2 μm)
  - 12AAB404 (5 μm)<sup>\*5</sup>
  - 12AAB416 (10 μm)<sup>\*5</sup>
- ( ) : Tip radius

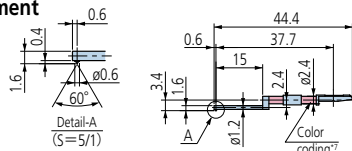


### Double-length for deep holes<sup>\*6</sup>

- 12AAE898 (2 μm)
  - 12AAE914 (5 μm)<sup>\*5</sup>
- ( ) : Tip radius



### Nosepiece


For small hole measurement  
12AAB346  
Remarks  
Hole diameter: ø4 or more  
Hole depth: 15 or less



### For small holes


#### Double-length for deep holes<sup>\*6</sup>

- 12AAE892 (2 μm)
  - 12AAE908 (5 μm)<sup>\*5</sup>
- ( ) : Tip radius

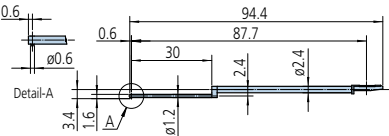


### For extra-small holes

- 12AAC733 (2 μm)
  - 12AAB405 (5 μm)<sup>\*5</sup>
  - 12AAB417 (10 μm)<sup>\*5</sup>
- ( ) : Tip radius




### For small holes<sup>\*6\*</sup>

- 12AAE884 (ø1.6 mm)




### Nosepiece

For ultra-small holes  
12AAB347  
Remarks  
Hole diameter: ø2.3 or more  
Hole depth: 6.5 or less




### For ultra-small holes<sup>\*8</sup>

- 12AAJ662 (ø0.5 mm)




### For ultra-small holes

- 12AAC734 (2 μm)
  - 12AAB406 (5 μm)<sup>\*5</sup>
  - 12AAB418 (10 μm)<sup>\*5</sup>
- ( ) : Tip radius



### For small slotted holes<sup>\*6</sup>

- 12AAE938 (2 μm)
- 12AAE940 (5 μm)<sup>\*5</sup>

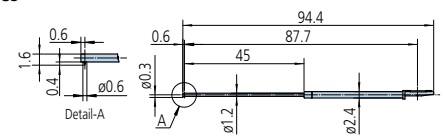

\*5 Tip angle 90°

\*6 For downward-facing measurement only.


\*7

| Tip radius   | 1 μm  | 2 μm  | 5 μm     | 10 μm  | 250 μm            |
|--------------|-------|-------|----------|--------|-------------------|
| Color coding | White | Black | No Color | Yellow | No notch or color |

\*8 Used for calibration, a standard step gauge (178-611, option) is also required


**For deep grooves (10 mm)**

- 12AAC735 (2 μm)
- 12AAB409 (5 μm)\*1
- 12AAB421 (10 μm)\*1
- ( ): Tip radius

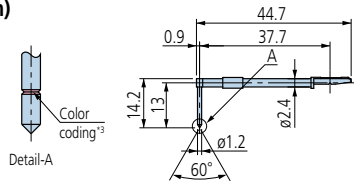


**Nosepiece**

- For deep grooves 10
- 12AAB349




Remarks  
Depth: 10 or less, Width: 9.5 or more

- For narrow grooves
- 12AAB350




Remarks  
Depth: 10 or less, Width: 3 or more

- For R-Surface
- 12AAB351




Remarks  
Convex: R1.5 or more  
Concave: R3 or more

- For vibration
- 12AAB352




**For deep grooves\*2 (20 mm)**

- 12AAC736 (2 μm)
- 12AAB408 (5 μm)\*1
- 12AAB420 (10 μm)\*1
- ( ): Tip radius



**Nosepiece**


- For deep grooves 20
- 12AAB348



Remarks  
Groove depth: 20 or less  
Groove pitches: 9.5 or more


**For deep grooves\*2 (30 mm)**

- 12AAC737 (2 μm)
- 12AAB407 (5 μm)\*1
- 12AAB419 (10 μm)\*1
- ( ): Tip radius

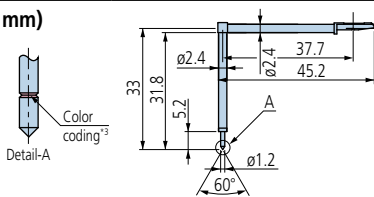

**For gear teeth**

- 12AAB339 (2 μm)
- 12AAB410 (5 μm)
- 12AAB422 (10 μm)
- ( ): Tip radius




**Nosepiece**

- For corners
- 12AAB353




**For rolling circle waviness surfaces\*4**

- 12AAB338 (ø1.588)
- ( ): Tip radius




**For knife-edges\*4**

- 12AAC738 (2 μm)
- 12AAB411 (5 μm)\*1
- 12AAB423 (10 μm)\*1
- ( ): Tip radius

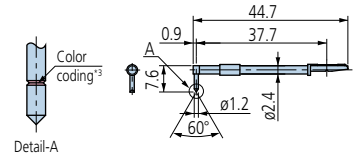


**Nosepiece**

- For knife-edges
- 12AAB354




**For eccentric arms\*2**

- 12AAC739 (2 μm)
- 12AAB412 (5 μm)\*1
- 12AAB424 (10 μm)\*1
- ( ): Tip radius

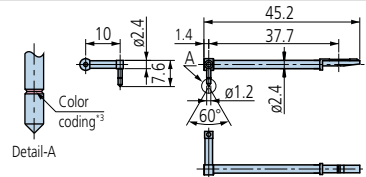


**For deep grooves\*2 (20 mm)**

- 12AAE893 (2 μm)\*1
- 12AAE909 (5 μm)
- ( ): Tip radius

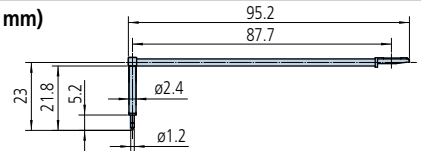


**For deep grooves\*2 (40 mm)**

- 12AAE895 (2 μm)\*1
- 12AAE911 (5 μm)
- ( ): Tip radius




**For deep grooves (30 mm) (length doubled for deeper variations) \*2**

- 12AAE894 (2 μm)\*1
- 12AAE910 (5 μm)
- ( ): Tip radius

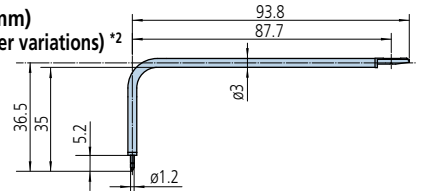


**For gear teeth (length doubled for deeper variations) \*2**

- 12AAE896 (2 μm)\*1
- 12AAE912 (5 μm)\*1
- ( ): Tip radius

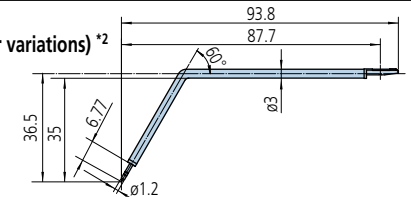


**For rolling circle waviness (length doubled for deeper variations) \*24**

- 12AAE886 (250 μm)
- ( ): Tip radius

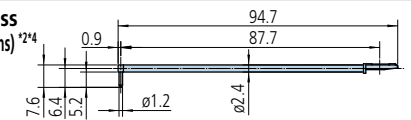


**For corner holes (length doubled for deeper variations) \*2**

- 12AAM601 (2 μm)
- 12AAM603 (5 μm)
- ( ): Tip radius

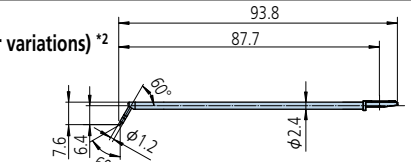

**Hole-bottom cone stylus**

- 12AAE899 (2 μm)
- 12AAE915 (5 μm)\*1
- ( ): Tip radius

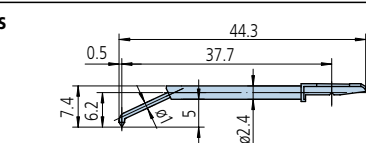

\*1 Tip angle 90°

\*2 For downward-facing measurement only.

\*3

|              |       |          |        |
|--------------|-------|----------|--------|
| Tip radius   | 2 μm  | 5 μm     | 10 μm  |
| Color coding | Black | No color | Yellow |

\*4 Used for calibration, a standard step gauge (178-611, option) is also required

Note: Customized special interchangeable styli are available on request. Please contact any Mitutoyo sales office for more information.

# Specifications

| Model No.                   | SJ-411   |  | SJ-412  |                            |                            |
|-----------------------------|--|--|---|----------------------------|----------------------------|
| Order No.                   | mm<br>inch/mm  | 178-580-11D<br>178-581-11D   | 178-580-12D<br>178-581-12D  | 178-582-11D<br>178-583-11D | 178-582-12D<br>178-583-12D |
| Measuring range             | X axis   | 25 mm  |   | 50 mm                      |                            |
|                             | Z axis (detector)  | 800 μm, 80 μm, 8 μm Up to 2,400 μm when using an optional stylus.  |   |                            |                            |
| Detector                    | Detection method   | Differential inductance  |   |                            |                            |
|                             | Resolution   | 0,01 μm (800 μm range), 0,001 μm (80 μm range), 0,0001 μm (8 μm range)   |   |                            |                            |
|                             | Stylus tip shape (Angle/Radius)  | 60°/2 μm   | 90°/5 μm  | 60°/2 μm                   | 90°/5 μm                   |
|                             | Measuring force  | 0,75 mN  | 4 mN  | 0,75 mN                    | 4 mN                       |
|                             | Radius of skid curvature   | 40 mm  |   |                            |                            |
|                             | Measuring methods  | Skidless/Skidded (switchable)  |   |                            |                            |
| Drive unit (X axis)         | Measuring speed  | 0,05, 0,1, 0,2, 0,5, 1,0 mm/s  |   |                            |                            |
|                             | Drive speed  | 0,5, 1, 2, 5 mm/s  |   |                            |                            |
|                             | Straightness   | 0,3 μm/25 mm   |   | 0,5 μm/50 mm               |                            |
| Up/down inclination unit    | Vertical travel  | 10 mm  |   |                            |                            |
|                             | Inclination adjustment angle   | ±1,5°  |   |                            |                            |
| Applicable standards        | JIS 1982/JIS 1994/JIS 2001/ISO 1997/ANSI/VDA   |  |   |                            |                            |
| Parameter                   | Ra, Rq, Rz, Ry, Rp, Rv, Rt, R3z, Rsk, Rku, Rc, Rpc, RSm, Rmax <sup>1</sup> , Rz1max <sup>2</sup> , S, HSC, RzJIS <sup>3</sup> , Rppi, R Δ a, R Δ q, Rlr, Rmr, Rmr (c), R σ c, Rk, Rpk, Rvk, Mr1, Mr2, A1, A2, Vo, λ a, λ q, Lo, Rpm, tp <sup>4</sup> , Htp <sup>4</sup> , R, Rx, AR, W, AW, Wx, Wte Customizable |  |   |                            |                            |
| Filtered profile            | Primary profile, Roughness profile, DF profile, Waviness profile, Roughness motif profile, Waviness motif profile  |  |   |                            |                            |
| Analysis graph              | Material ratio curve, Profile height amplitude distribution curve  |  |   |                            |                            |
| Data compensation functions | Parabola, Hyperbola, Ellipse, Circle, Tilt, No compensation  |  |   |                            |                            |
| Filter                      | 2CR, PC75, Gaussian  |  |   |                            |                            |
| Cutoff value                | $\frac{\lambda c}{\lambda s^{0.5}}$  | 0.08, 0.25, 0.8, 2.5, 8 mm   |   |                            |                            |
|                             |  | 2.5, 8, 25 μm  |   |                            |                            |
| Sampling length             | 0.08, 0.25, 0.8, 2.5, 8, 25 mm   |  |   |                            |                            |
| Number of intervals         | ×1, ×2, ×3, ×4, ×5, ×6, ×7, ×8, ×9, ×10, ×11, ×12, ×13, ×14, ×15, ×16, ×17, ×18, ×19, ×20  |  |   |                            |                            |
| Arbitrary length            | 0,1 to 25 mm   |  | 0,1 to 50 mm  |                            |                            |
| Calculation display unit    | Customization  | Selection of display/evaluation roughness parameter  |   |                            |                            |
|                             | Simplified contour analysis function   | Step, Step quantity, Area, Coordinate difference   |   |                            |                            |
|                             | DAT (Digimatic Adjustment Table) function  | Helps to level workpiece prior to skidless measurement   |   |                            |                            |
|                             | Real sampling function   | Inputs the displacement of the detector while stopping the drive unit  |   |                            |                            |
|                             | statistical processing   | Calculates the maximum value, minimum value, average value, standard deviation, pass rate and histogram for each parameter.  |   |                            |                            |
|                             | Judgment <sup>6</sup>  | Maximum value rule, 16 % rule, mean value rule, standard deviation (1 σ, 2 σ, 3 σ)   |   |                            |                            |
|                             | Storing measurement condition  | Max. 10 (calculation display unit)   |   |                            |                            |
|                             | Print function (Built-in thermal printer)  | Measurement condition/Calculation result/Judgment result/Calculation result per segment/Tolerance value/Evaluation curve/Graphic curve/Material ratio curve/Profile height amplitude distribution curve/Environmental setting items/Statistical result (Histogram) |   |                            |                            |
|                             | Display language   | 16 languages (Japanese, English, German, French, Italian, Spanish, Portuguese, Korean, Chinese (simplified/traditional), Czech, Polish, Hungarian, Turkish, Swedish, Dutch)  |   |                            |                            |
|                             | Storage function   | Built-in memory: Measurement condition (Up to 10)<br>Memory card (optional): 500 measurement conditions, 10000 measured profiles, 500 display images, 10000 text files, 500 statistical data, 1 backup file of device setting data, 10 data of Trace 10            |   |                            |                            |
| External I/O functions      | USB I/F, Digimatic output, RS-232C I/F, Footswitch I/F   |  |   |                            |                            |
| Power supply                | Battery  | Built-in battery (rechargeable Ni-MH battery) /AC adapter  |   |                            |                            |
|                             | Charging time/Endurance  | Charging time of the built-in battery: about 4 hours (may vary due to ambient temperature)<br>Endurance: about 1000 measurements (differs slightly due to use conditions/environment)  |   |                            |                            |
|                             | Max. power consumption   | 50 W   |   |                            |                            |
| External dimensions (WxDxH) | Calculation display unit   | 275x198x109 mm   |   |                            |                            |
|                             | Up/down inclination unit   | 130,9x63x99 mm   |   |                            |                            |
|                             | Drive unit   | 128x35,8x46,6 mm   |   | 154,5x35,8x46,6 mm         |                            |
| Mass                        | Calculation display unit   | 1,7 kg   |   |                            |                            |
|                             | Up/down inclination unit   | 0,4 kg   |   |                            |                            |
|                             | Drive unit   | 0,6 kg   |   | 0,64 kg                    |                            |
| Standard Accessories        | Detector <sup>7</sup> /Standard stylus <sup>8</sup><br><b>178-601</b> Roughness specimen (Ra3 μm)<br><b>270732</b> Receipt paper (Standard type: 5-roll set)<br><b>12BAL402</b> Protective sheet for the LCD (x1 sheet)<br><b>12BAG834</b> Touch pen<br><b>12AAN041</b> Carrying case                            |  | AC adapter, Power cable, Flat-blade screwdriver, Phillips screwdriver, Hex wrench, Strap for the touch pen, Operation manual, One-sheet manual, Warranty card |                            |                            |

\*1 Calculation is available only when selecting the VDA, ANSI, or JIS 1982 standards.

\*2 Calculation is available only when selecting the ISO 1997 standard.

\*3 Calculation is available only when selecting the JIS 2001 standard.

\*4 Calculation is available only when selecting the ANSI standard.

\*5 Not available when selecting the JIS 1982 standard.

\*6 Only the mean value rule is available for the ANSI standard. 16 % rule is not available when selecting the VDA standard.


\*7 Depending on the Order No. of the SJ-410 Series main unit, **178-396-2** or **178-397-2** is provided as standard.

\*8 Standard stylus (**12AAC731** or **12AAB403**) supporting the provided detector is provided as standard.

Note 1: Refer to pages 12 to 13 for details of Detector, Stylus and Nosepiece.

# Dimensions

Unit: mm

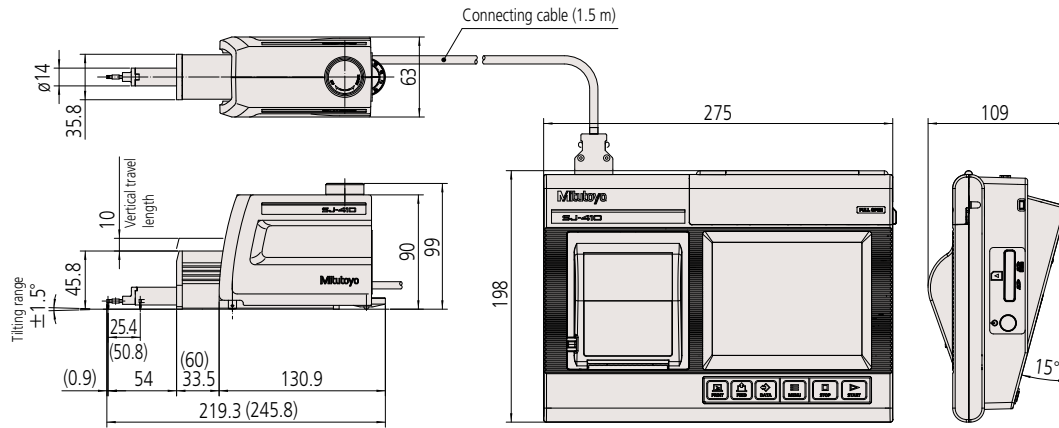


Note: Dimensions in parentheses indicate those of **SJ-412** [equipped with a 50 mm drive unit].

## Example of mounting on a simple column stand. (178-039)\*1

Unit: mm

\*1 For details see page 5.

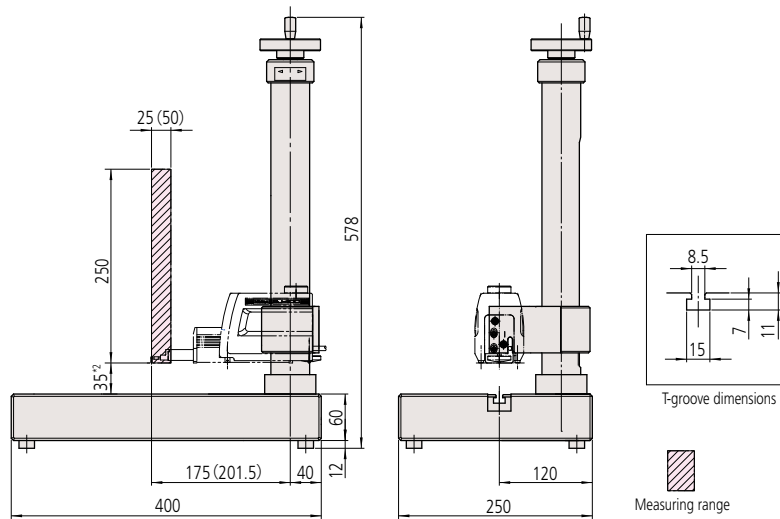

\*2 This is the lowest position of the standard stylus mounted on the simple column stand. Since it is 35 mm from the base top, a block of suitable height is required for calibration with a roughness specimen. Use the stand in combination with optional accessories such as a leveling table (178-016) or an XY leveling table (178-024).


Note: The dimensions in parentheses indicate those for **SJ-412**

Coordinate Measuring Machines

Vision Measuring Systems

Form Measurement


Optical Measuring



Sensor Systems

Test Equipment  
and Seismometers


Digital Scale and DRO Systems

Small Tool Instruments  
and Data Management

Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top-quality measuring products but one that also offers qualified support for the lifetime of the equipment backed up by comprehensive services, ensuring your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test, and deliver bespoke measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.



Find additional product literature and our complete catalog here.

[www.mitutoyo.eu](http://www.mitutoyo.eu)

**Note:** Product illustrations are without obligation. Product descriptions, in particular all technical specifications, are only binding when explicitly agreed upon. MITUTOYO and MiCAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions. Other product, company, and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.

# Mitutoyo

Mitutoyo Europe GmbH

Borsigstraße 8-10

41469 Neuss

Tel. +49 (0) 2137-102-0

Fax +49 (0) 2137-102-351

[info@mitutoyo.eu](mailto:info@mitutoyo.eu)

[www.mitutoyo.eu](http://www.mitutoyo.eu)