

Micromar 40 EWR-B

Digital micrometer



REFERENCE


FUNCTIONS

- RESET (set display to zero)
- ABS (display can be set to zero without losing reference to ORIGIN)
- mm/inch
- ORIGIN (for entering a numerical value)
- LOCK function (key lock)
- TOL (Tolerance and warning limits)
- HOLD (storage of measured values)
- DATA (data transmission)
- Bi-directional data interface (external input option of characteristic values and setting of individual lock functions by software MarCom)



Application:

For measuring grooves, spline shafts, recesses, etc.

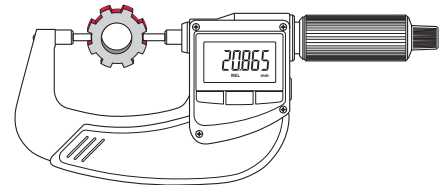

FEATURES


- Reduced measuring surfaces \varnothing 3 mm
- High contrast analog display
- Stainless spindle is hardened throughout and ground
- Spindle and anvil are carbide tipped
- Rapid drive
- Ratchet is integrated in the thimble
- Lacquered steel frame, heat insulated
- **Software:** MarCom Professional free download: www.mahr.com/marcom (only for Mahr data cables and wireless systems with USB and RS232 interface)
- **Digit height:** 10 mm
- **Data interface:** MarConnect (bidirectional), USB, Digimatic
- **Energy supply:** Battery life approx. 2 years
- **IP protection category:** IP 65
- **Package contains:** instruction manual, battery, setting standard (measuring range of 25–50 mm), case

TECHNICAL DATA

Order no.	Type	Measuring range	Measuring surface	Resolution	Error limit	Spindle thread pitch	Measuring force	Standard
		mm		mm/inch	μm	mm	N	
4157032	40 EWR-B	0–25	carbide	0,001 / .00005"	4	0,5	5–10	DIN 863–3
4157033	40 EWR-B	25–50	carbide	0,001 / .00005"	4	0,5	5–10	DIN 863–3

Order no.	a	b	c
	mm	mm	mm
4157032	32	11,5	57
4157033	44	13,5	82

40 EWR(i)-B

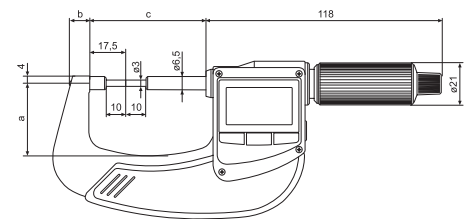

ACCESSORIES

Order no.	Description	Type
4102520	Battery 3 V, CR 2032	
4102603	Data cable USB bi-directional (2 m)	DK-U1
4102606	Digimatic data cable (2 m)	DK-D1
4158000	Stand, for holding outside micrometers	41 H



41 H