

# Surtronic<sup>®</sup> S-100 Series



Robust and portable surface roughness testers

# Surtronic® S-100

## Handheld portable surface roughness testers **Tough, fast and reliable**

### Durable roughness testers for shop floor, industrial & inspection room applications.

Working closely with manufacturers across a wide range of industries including precision bearings, automotive and aerospace engineering, Taylor Hobson have focused on the key attributes that are most important for quality control in today's precision industries

The Surtronic® S-100 Series of instruments offer a versatile solution for all your roughness requirements with a variety of systems and application specific accessories along with fixtures that can be tailored to your specific need.



### Any surface, any height

The inclusion of a 50 mm stylus lift with right-angle attachment and more than 70 mm stylus reach means that even the most challenging surfaces can be measured without the need for expensive riser blocks, stands or fixtures.

The anti-slip V-feet also mean the system can be used on flat or curved surfaces. The stylus can even measure upside down!

The pick-up holder is mounted on a slide for vertical adjustment and can also be rotated to different measuring positions, including right-angled measurement.

### An excellent investment

-  Improve throughput
-  Reduce part scrappage
-  Monitor tool wear
-  Ensure traceability



### Fast and reliable...

Simply press the measurement button and in a few seconds a full set of traceable measurement results including a detailed profile graph will be displayed.

#### 1 Lift/lower

Supplied as standard providing 50 mm height adjustment, right angle measurement and 70 mm reach into bores.

#### 2 Measure

Tactile measurement button, great when device is being used overhead or inside pipes. InstantOn technology enables measurement to be taken in less than 1 second from standby and fully charged can remain in standby for more than 5000 hours.



### 3 Profile graph

Recessed, Mylar protected high durability touch screen shows detailed graph of measured area to help identify problem areas.

### 4 Anti-slip feet

Perfect for mounting on flat or curved surfaces. V design aligns measurement with cylinder axis.

### 5 Comfort grip

Sits comfortably in the hand when reviewing results or changing settings.

### 6 Rubberised moulding

Impact resistant rubberised moulding adds protection and better grip in the hand, invaluable for shop floor environments.

### 7 Simple set-up

Shortcuts provided for all the key settings to give instant access with just a single touch.

### 8 Orientation

Rotate the display to any of 4 orientations – perfect for awkward measurements.

### 9 Power

System power is provided by a 3000 mAh heavy duty Li-Poly battery that can provide up to 2000 measurements from a single charge.

### 10 USB connectivity

Through its industry standard Type A USB port and mini USB port the S-100 series instruments provide extensive connectivity options to many standard devices.

# Designed to suit your application


Meeting the ever increasing demands of next generation technologies...



Gears




Grinding

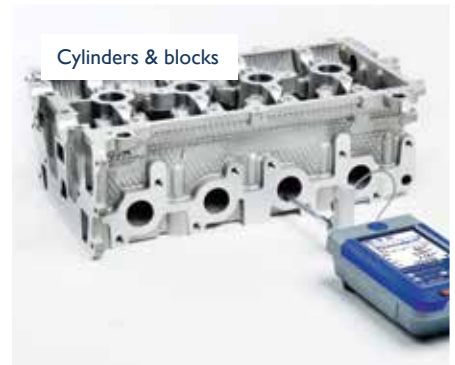

Cylinders & blocks



Milling

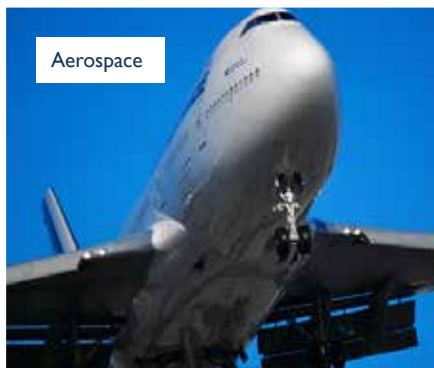


Aerospace



Honing



Turbines

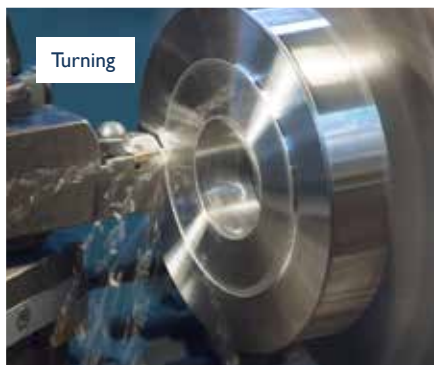

Turning

## Plus many more...

- **Process control** – Grinding, milling, turning, honing, polishing, extrusion
- **Automotive** – Gears, con rods, cylinders, blocks, crankshafts
- **Aerospace** – Turbine blades, turbine shafts, wing composites
- **Other** – Print rollers, flooring, bonding

## Further benefits...

### In situ measurements

Monitor wear and roughness changes in situ during product's life. Eg. Monitoring changes in turbine blade roughness as an early warning sign for defects and efficiency losses.

### User-friendly

The Surtronic® S-100 is as easy to use as any SatNav (GPS) or SmartPhone with a 4.3" daylight readable industrial touch screen display. Results are displayed with up to 7 parameters per page as well as measurement settings and system information.

### Standards and traceability

The reference standard supplied can be used both to calibrate the instrument and check for stylus wear to ensure the most accurate results are always being achieved.

Measurement	Best capability
Roughness standards (Ra)	$\pm(2\% + 0.004 \mu\text{m})$
Workpiece or component surface texture (Ra)	$\pm 3\%$ of measured value per trace

### UKAS calibration & testing

Taylor Hobson provides full certification for artefacts and instruments in our purpose built ISO graded clean room UKAS facility.

Our UKAS laboratory is able to measure all of the parameters associated with surface texture, including French, German, USA and Japanese derivatives.



# Powerful software - TalyProfile 8


## Advanced surface finish analysis

TalyProfile is a dedicated PC based software package designed for use with Surtronic® S-100 Series instruments.

	Silver	Gold
Surtronic® S-Series acquisition	✓	✓
Desktop publishing templates	✓	✓
Multi-language support	✓	✓
EN, FR, DE, ES, IT, PL, CN, KR	✓	✓
Levelling	✓	✓
Symmetries	✓	✓
Zoom	✓	✓
ISO 4287	✓	✓
Material Ratio Curve	✓	✓
Area of a hole/peak	✓	✓
Profile parameters & curves	✓	✓
Roughness & waviness curves	✓	✓
Distance measurement	✓	✓
Multiple file format reports	✓	✓
Report printing	✓	✓
Form Talysurf data import	✓	✓
Tolerance limits (pass/fail)	✓	✓
Data file explorer	✓	✓
ISO 13565 Automotive	✓	✓
Interactive MR curve	✓	✓
Step height measurement	✓	
Form removal	✓	
Filtering by FFT	✓	
Thresholding	✓	
Frequency spectrum	✓	
Power spectrum density	✓	
Retouch profile point	✓	
Rk parameters	✓	
Rk Parameters curves	✓	
ISO 12085 R&W motifs	✓	

## Advanced time-saving analysis templates

A 'template' can be created whereby a sequence of analysis functions can be saved and applied to future measurements, turning detailed reporting tasks into routine documents.

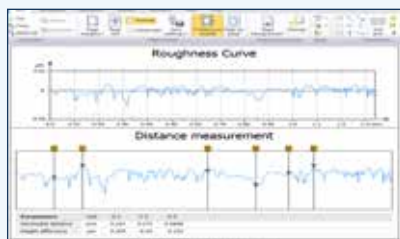

## Outstanding graphics

The software is visually advanced and provides clear on screen profile images. TalyProfile allows the user to take a basic measurement and create a full measurement report using the software's detailed analysis options and desktop publishing function.

## Desktop publishing facility

TalyProfile offers a comprehensive desktop publishing function which allows clear presentation of measurements, results and profiles. Graphs, profiles and results can be arranged from within the TalyProfile software giving complete flexibility in reporting.

## In depth analysis

Profiles can be levelled and zoomed to remove unwanted features or defects from the analysis. Distance measurement between features of a profile are easily achieved and the information can be displayed graphically and numerically. Step height and the area of a valley or peak can also be calculated.

## Full compatibility

Surface finish results from other Taylor Hobson surface roughness instruments can be imported to TalyProfile software, allowing a uniform report style to be used throughout your workshop or laboratory.

## Pass/Fail tolerances

All parameters can be assigned nominal, minimum and maximum values.

## New features & benefits



- Customised analysis settings
- Batch analysis
- Undo & redo
- Drag and drop files
- Multiple tabbed documents
- Improved parameters calculation
- Quick extraction operators
- Quicker calculation times
- Advanced Modules (THAMs)

## TalyProfile parameters

	Silver	Gold
<b>ISO 4287</b>		
Rz, Rp, Rv, Rz, Rc, Rt, Ra, Rq, Rsk, Rku, RSm, Rdq, Rmr, Rdc, RPc	✓	✓
Pp, Pv, Pz, Pc, Pt, Pa, Pq, Psk, Pku, PSm, Pdq, Pmr, Pdc, PPc	✓	✓
Wp, Wv, Wz, Wc, Wt, Wa, Wq, Wsk, Wku, WSm, Wdq, Wmr, Wdc, WPC	✓	✓
<b>ISO 13565</b>		
Rk, Rpk, Rvk, Mr1, Mr2		✓
Ppq, Pvq, Pmq		✓
Rpq, Rvq, Rmq		✓
<b>ISO 12085</b>		
R, AR, Rx, Pt, Kr, Nr, SR, SAR		✓
W, AW, Wx, Wte, Kw, Nw, SW, SAW		✓
Trc, HTrc, Rke, Rpkc, Rvkce		✓
<b>Other 2D Parameters</b>		
PLq, Pda, PLa, PLo, PzJIS, P3z, Pmax, Ptm, Py, PH, PHSC, PD, PS, Pvo, Prms, PTP, PHTp, Pfd, Ppm		✓
RLq, Rda, RLa, RLo, RzJIS, R3z, Rmax, Rtm, Ry, RH, RHSC, RD, RS, Rvo, Rrms, RTP, RHTp, Rfd, Rpm		✓
WLq, Wda, WLa, WLo, WzJIS, W3z, Wmax, Wtm, Wy, WH, WHSC, WD, WS, Wvo, Wrms, WTP, WHTp, Wfd, Wpm		✓
<b>Applicative Parameters</b>		
PG, AF, CH		✓
<b>ASME B46.1</b>		✓
Rt, Rp, Rv, Rz, Rpm, Rmax, Ra, Rq, Rsk, Rku, tp, Htp, Pc, Rda, Rdq, RSm, Wt		✓
<b>Addon</b>		✓
MaxHeight, AverageHeight, MinHeight, MaxArea, AverageArea, MinArea		✓

## Windows® PC specification\*

Operating system	Windows® 10
Memory (RAM)	3 GB
CPU speed	2 GHz
Screen resolution	1920 x 1080
USB port	2.0

## Get your free trial

Scan the code to download TalyProfile 8 Silver Software



# Technical specifications

Instrument performance		S-116	S-128
Language	Basic	English, French, German, Italian, Spanish	
	Extended	Czech, Portuguese, Romanian, Hungarian, Swedish, Russian	
	Asian	Japanese	
Data output	On-screen	Up to 7 results per page, selectable on-screen graph with XZ axis	
	Printer	Output settings, results and high resolution profile graph	
	PC Connection	Full data analysis with TalyProfile	
Data storage	Internal	100 measurement results, 1 raw profile	
	USB (4GB supplied)	>39,000 raw profiles, up to 100,000 results per batch (>70 batches)	
	PC connection	Unlimited data storage	
SPC / stats	Internal	Optional	Min, Max, Mean, StdDev of stored results
	USB (4GB supplied)	Optional	ASCII export of all results for SPC
	PC connection	Full SPC and tolerancing of all parameters using TalyProfile software	
Battery	Charger	USB 5v 1A 110-240VAC 50/60Hz	
	Charging time	4 hours	
	Battery life	2000 measurements	
	Standby time	5000 hours	
	InstantOn	Max. 1 sec from standby to ready to measure	
	Auto sleep function	30 sec - 6 hours	
Component capacity		S-116	S-128
Physical specifications	Weight (inc. pickup)	0.5 Kg (1.1 lbs)	
	Dimensions	See page 9	
	Power source	Li Poly rechargeable battery	
Operating conditions	Temperature	5 - 40 °C (41 - 104 °F)	
	Humidity	0 - 80 % non-condensing	
Storage conditions	Temperature	0 - 50 °C (32 - 122 °F)	
	Humidity	0 - 80 % non-condensing	

Measurement capability		S-116	S-128
Gauge	Range	200 / 100 / 10 $\mu$ m	400 / 100 / 10 $\mu$ m
	Resolution	100 / 20 / 10 nm	50 / 10 / 5 nm
	Noise floor <sup>1</sup> (Ra)	250 / 150 / 100 nm	150 / 100 / 50 nm
	Repeatability <sup>2</sup> (Ra)	1 % of value + noise	0.5 % of value + noise
	Pickup type	Inductive	
	Gauge force	150-300 mg	
	Stylus tip radius	5 $\mu$ m (200 $\mu$ in) / 2 $\mu$ m* (80 $\mu$ in) or 10 $\mu$ m* (400 $\mu$ in)	
	Measurement type	Skidded	
Calibration	Process	Automated software calibration routine	
	Standards	Able to calibrate to ISO 4287 roughness standards	
Analysis	Filter cut-off	0.25 mm / 0.8 mm / 2.5 mm	
	Filter type	2CR / Gaussian	
	Evaluation length	0.25 - 17.5 mm (0.01 - 0.70 in)	0.25 - 25.0 mm (0.01 - 1.00 in)
	Max. X axis range	17.5 mm	25.5 mm
Speed	Measuring speed	1 mm / sec (0.04 in / sec)	
	Returning speed	1.5 mm / sec (0.06 in / sec)	
Analysis capability (instrument)		S-116	S-128
Parameters	Standards	ISO 4287, ISO 13565-1, ISO 13565-2, ASME 46.1, JIS 0601, N31007	
	ISO basic	Ra, Rv, Rp, Rz, Rt, Rq, Rsk, Rmr, Rdq, Rpc, RSm, Rz1max	
	ISO advanced	Optional	Rk, A1, A2, Mr1, Mr2, Rpk, Rvk
	ASME	Ra, Rv, Rp, Rz, Rt, Rq, Rsk, Rdq, RSm, Rpm, Rda	
	JIS	Ra, Rv, Rp, Rz, Rt, Rq, Rsk, Rmr, Rdq, RSm, RzJIS, Rc, Rku, Rdc	
	Other	R3z (Daimler Benz)	
	ISO Primary	Optional	Pa, Pv, Pp, Pz, Pt, Pq, Psk, Pmr, Pdq, Ppc, PSm, Pz1max
	Units	$\mu$ m / $\mu$ in	

1. Ra measured over a glass flat nominally parallel to the traverse datum.

2. Based on measurements of Ra taken on roughness specimens up to 25  $\mu$ m Ra.


# Pick-ups

## Standard pick-up

For general surface roughness measurement.

Code PK-02 - 5 µm tip rad.


Code PK-03 - 10 µm tip rad.



## Narrow gauge stylus

For measuring in 'O' rings and narrow grooves up to a depth of 5.5 mm (0.22 in).


Code PK-07



## Small bore pick-up

For general use in small bores, grooves and narrow surfaces. Ø3 mm (0.12 in) bore minimum.


Code PK-01



## Right angle pick-up

For measurement at right angles to the direction of traverse.


Code PK-05



## Chisel edge pick-up

For measuring along sharp edges / wire. Not for use on flat surfaces.


Code PK-24



## Side skid pick-up

For use on curved surfaces such as gear teeth.

Code PK-31




## Recess pick-up\*\*

For measuring into deep recesses.

Code PK-06 - 5.7 mm (0.23 in) recess with 5 µm tip rad.


Code PK-08 - 25 mm (0.98 in) recess with 5 µm tip rad.




## Shoe pick-up

For measuring rougher surfaces, particularly with the 2.5 mm (0.1 in) cut-off.

Code PK-99



## Dimensions

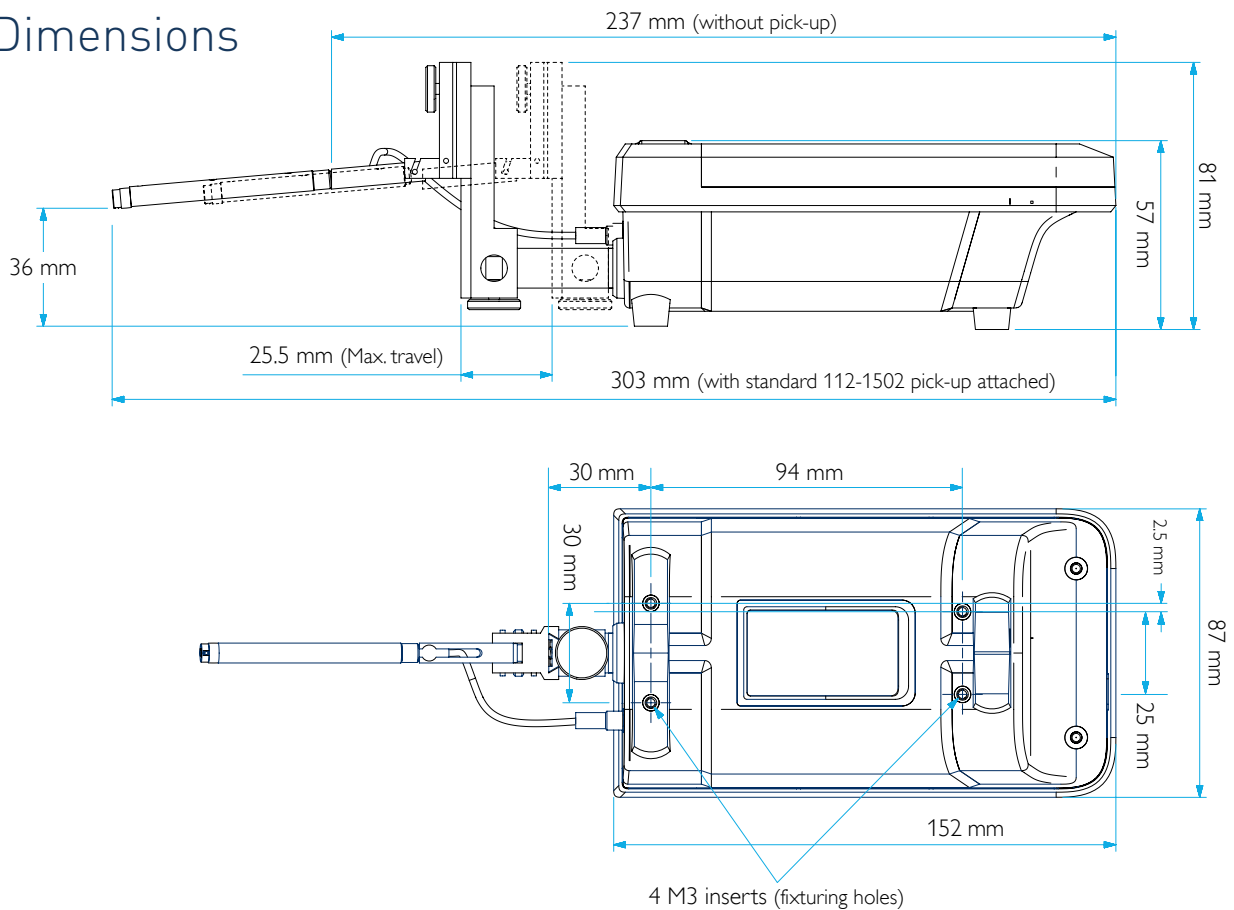

\*\* Other depths and tip radii available.

## The Metrology Experts

Established in 1886, Taylor Hobson is the world leader in surface and form metrology and developed the first roundness and surface finish measuring instruments.

[www.taylor-hobson.com](http://www.taylor-hobson.com)

## Sales department

Email: [taylor-hobson.sales@ametek.com](mailto:taylor-hobson.sales@ametek.com)

Tel: +44 (0) 116 276 3771

- **Design engineering** – special purpose, dedicated metrology systems for demanding applications.
- **Precision manufacturing** – contract machining services for high precision applications and industries.

## Centre of Excellence department

Email: [taylor-hobson.cofe@ametek.com](mailto:taylor-hobson.cofe@ametek.com)

Tel: +44 (0) 116 276 3779

- **Inspection services** – measurement of your production parts by skilled technicians using industry leading instruments in accord with ISO standards.
- **Metrology training** – practical, hands-on training courses for roundness and surface finish conducted by experienced metrologists.
- **Operator training** – on-site instruction will lead to greater proficiency and higher productivity.
- **UKAS calibration and testing** – certification for artifacts or instruments in our laboratory or at customer's site.

## Service department

Email: [taylor-hobson.service@ametek.com](mailto:taylor-hobson.service@ametek.com)

Tel: +44 (0) 116 246 2900

- **Preventative maintenance** – protect your metrology investment with an AMECare support agreement.



© Taylor Hobson Ltd. 2020



### Taylor Hobson UK

(Global Headquarters)

PO Box 36, 2 New Star Road  
Leicester,  
LE4 9JQ,  
England

Tel: +44 (0)116 276 3771  
[taylor-hobson.sales@ametek.com](mailto:taylor-hobson.sales@ametek.com)



### Taylor Hobson France

Rond Point de l'Épine Champs  
Batiment D, 78990 Elancourt, France

Tel: +33 130 68 89 30  
[taylor-hobson.france@ametek.com](mailto:taylor-hobson.france@ametek.com)



### Taylor Hobson Germany

Rudolf-Diesel-Straße 16,  
D-64331 Weiterstadt, Germany

Tel: +49 6150 543 0  
[taylor-hobson.germany@ametek.com](mailto:taylor-hobson.germany@ametek.com)



### Taylor Hobson Italy

Via Della Liberazione 24, 20068, Peschiera  
Borromeo, Zelofoaramagno, Milan, Italy

Tel: +39 02 946 93401  
[taylor-hobson.italy@ametek.com](mailto:taylor-hobson.italy@ametek.com)



### Taylor Hobson India

Divyasree NR Enclave, 4th Floor, Block A,  
Plot No. 1, EPIP Industrial Area, Whitefield,  
Bengaluru - 560066, India

Tel: +91 80 6782 3346  
[taylor-hobson.india@ametek.com](mailto:taylor-hobson.india@ametek.com)



### Taylor Hobson China

[taylor-hobson-china.sales@ametek.com](mailto:taylor-hobson-china.sales@ametek.com)

#### Shanghai Office

Part A1, A4, 2nd Floor, Building No. 1, No. 526  
Fute 3rd Road East, Pilot Free Trade Zone,  
Shanghai, 200131, China

Tel: +86 21 5868 5111-110

#### Beijing Office

Western Section, 2nd Floor, Jing Dong Fang  
Building (B10), No. 10, Jiu Xian Qiao Road,  
Chaoyang District, Beijing, 100015, China

Tel: +86 10 8526 2111

#### Chengdu Office

No. 9-10, 10th floor, 9/F, High-tech Incubation  
Park, No. 160, Jinyue West Road, Chengdu  
610041, China

Tel: +86 28 8675 8111

#### Guangzhou Office

Room 810 Dongbao Plaza, No.767 East  
Dongfeng Road, Guangzhou, 510600, China

Tel: +86 20 8363 4768



### Taylor Hobson Japan

3F Shiba NBF Tower; 1-1-30, Shiba Daimon  
Minato-ku, Tokyo 105-0012, Japan

Tel: +81 34400 2400  
[taylor-hobson.japan@ametek.com](mailto:taylor-hobson.japan@ametek.com)



### Taylor Hobson Korea

#309, 3rd FL, Gyeonggi R&DB Center; 105,  
Gwanggyo-ro, Yeongtong-gu, Suwon-si,  
Gyeonggi-do, Korea, 16229

Tel: +82 31 888 5255  
[taylor-hobson.korea@ametek.com](mailto:taylor-hobson.korea@ametek.com)



### Taylor Hobson Singapore

AMETEK Singapore, 10 Ang Mo Kio Street 65,  
No. 05-12 Techpoint, Singapore 569059

Tel: +65 6484 2388 Ext 120  
[taylor-hobson.singapore@ametek.com](mailto:taylor-hobson.singapore@ametek.com)



### Taylor Hobson Thailand

89/45, Moo 15, Enterprise Park, Bangna-Trad  
Road, Tambol Bangkaew, Amphur Bangplee,  
Samutprakarn Province 10540, Thailand

Tel: +66 2 0127500 Ext 505  
[taylor-hobson.thailand@ametek.com](mailto:taylor-hobson.thailand@ametek.com)



### Taylor Hobson Taiwan

10F-5, No.120, Sec. 2, Gongdao Wu Rd.,  
Hsinchu City 30072, Taiwan

Tel: +886 3 575 0099 Ext 301  
[taylor-hobson.taiwan@ametek.com](mailto:taylor-hobson.taiwan@ametek.com)



### Taylor Hobson Mexico

Acceso III No. 16 Nave 3 Parque Ind. Benito  
Juarez Queretaro, Qro. Mexico C.P. 76120

Tel: +52 442 426 4480  
[taylor-hobson.mexico@ametek.com](mailto:taylor-hobson.mexico@ametek.com)



### Taylor Hobson USA

27755 Diehl Road, Suite 300, Warrenville,  
IL 60555, USA

Tel: +1 630 621 3099  
[taylor-hobson.usa@ametek.com](mailto:taylor-hobson.usa@ametek.com)



1100 Cassatt Road, Berwyn, PA 19312, USA  
Email: [info.corp@ametek.com](mailto:info.corp@ametek.com)  
Web: [www.ametek.com](http://www.ametek.com)